


6 Product Dimensions







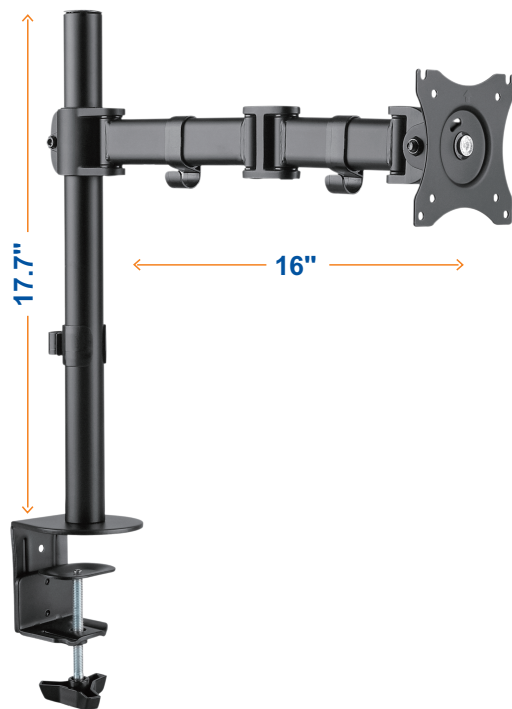



Maintenance

Please check that the desk mount is secure and safe to use at regular intervals. If you have any questions regarding any of the instructions or warnings; please contact your local distributor directly (OR) contact QualGear technical support via email at support@qualgear.com.

Scan the QR Code™ below to contact us:



- | | |
|---|---|
|  +1 (972) 423-8960 |  support@qualgear.com |
|  facebook.com/qualgear |  youtube.com/qualgear |
|  twitter.com/qualgear |  store.qualgear.com |
|  pinterest.com/qualgearusa |  google.com/+qualgear |


QualGear®

Accessories that Inspire.

QG-DM-01-022

INSTALLATION MANUAL

3-WAY ARTICULATING SINGLE MONITOR DESK MOUNT

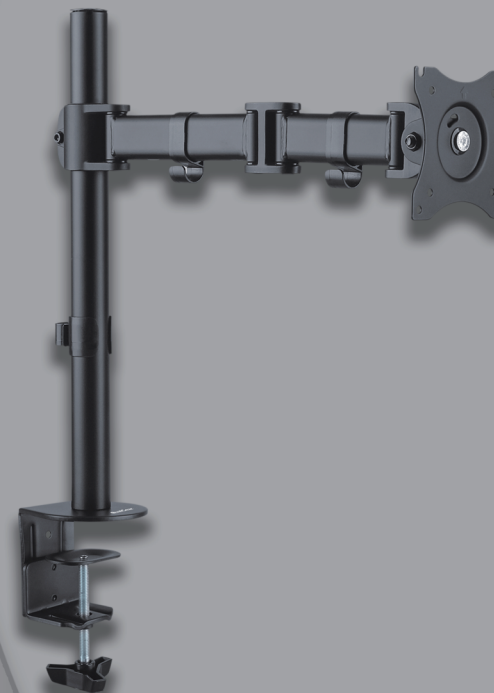

Scan the QR Code™ below for more info about this product:



For Most 13" to 27" Flat Screen Monitors and TVs

8kg
(17.6lbs)
RATED

CAUTION!

Do not exceed the maximum rated weight specified. Otherwise, serious injury or property damage may occur.



VESA

75x75 | 100x100

■ 1 Year Limited Warranty

■ Version May 2018


NOTE Please read the entire installation manual before you start assembly and installation.

WARNING

- Do not begin the installation of this product before you have read and understood all the instructions and warnings contained in this installation manual. If you have any questions regarding the instructions, please contact the reseller or QualGear support department via email at support@qualgear.com.
- This mounting bracket was designed to be installed and utilized **ONLY** as specified in this manual. Improper installation of this product may cause damage or serious injury.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- This product should only be installed by someone, who has good mechanical ability with prior experience in installation and assembly of products and fully understands this manual.
- Always use an assistant or mechanical lifting equipment to safely lift and position the equipment.
- Tighten screws firmly, but do not over tighten. Over tightening can cause damage to the items. This greatly reduces their holding power.
- All QualGear products are intended for indoor use only and any outdoor use voids the limited warranty.
- All QualGear products are designed and tested for residential use only and any commercial use voids the limited warranty. For warranty information, please visit qualgear.com/warranty.php.

Parts Checklist


IMPORTANT: Before starting installation, please check that all parts shown in this checklist are included. If any parts are missing or damaged, contact your local distributor or support@qualgear.com for replacement parts and do not start assembly and installation until you receive all the parts.



Adapter Bracket
Assembly (x1)
A



Pole (x1)
B

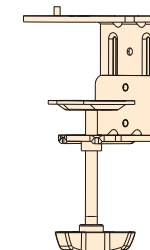

Desk Clamp
Assembly (x1)
C

Hardware Package



Cable Clip (x1)
D



Base Plate (x1)
E



Silicone Pad (x5)
F




M10x20mm (x1)
G



Pad (x1)
H



5mm Allen Key (x1)
I



6mm Allen Key (x1)
J



M3x12mm (x4)
M-A



M4x12mm (x4)
M-B



M5x12mm (x4)
M-C






D3 Washer (x4)
M-D



D5 Washer (x4)
M-E




1a Edge Installation

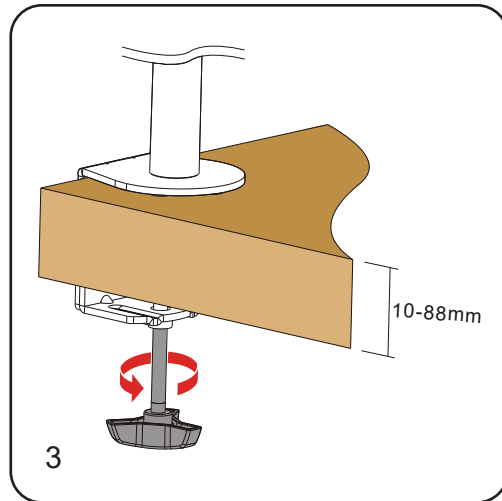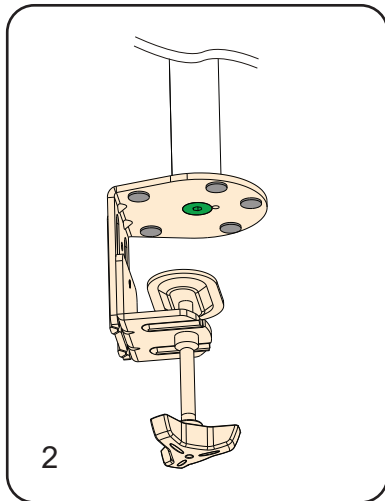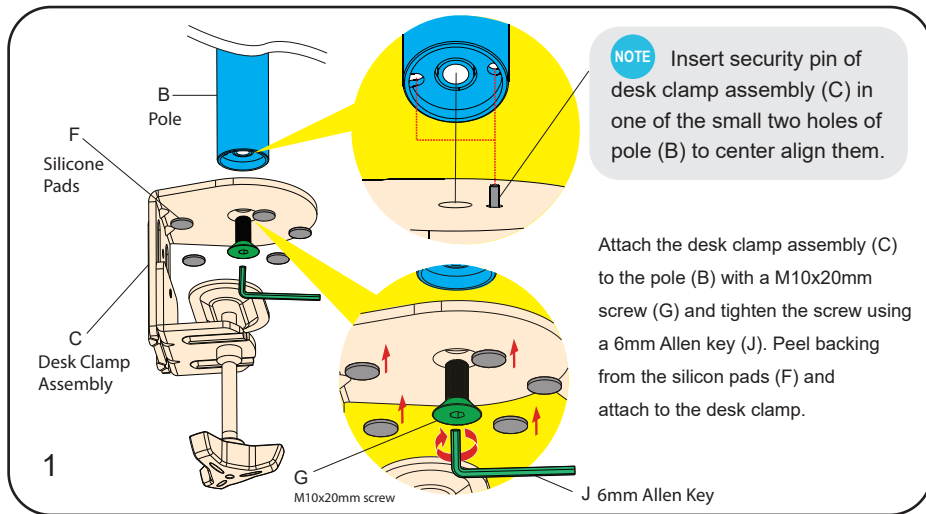

- Determine the mounting location, and then place the desk mount over the edge of the desk so that the clamp fully contacts the desk edge.
- Turn the knob to make clamp fit to the desk edge, then secure it tightly.

NOTE Min. Desktop Thickness = 10mm (0.39") / Max. Desktop Thickness = 88mm (3.46")

1b Grommet Installation

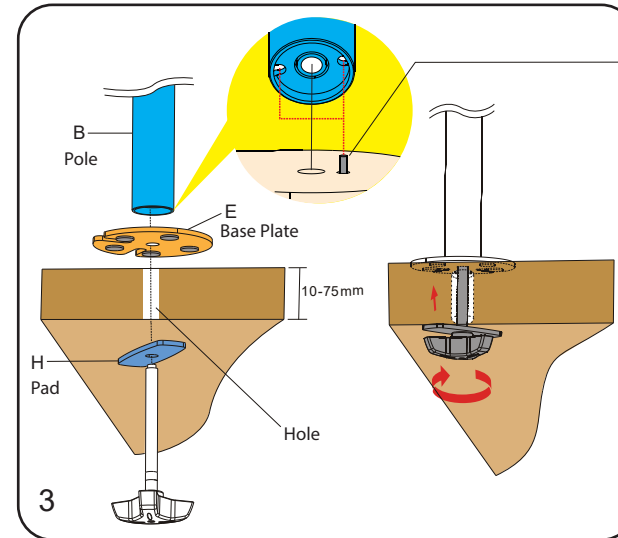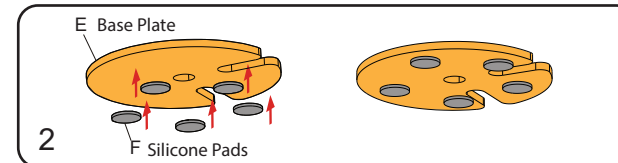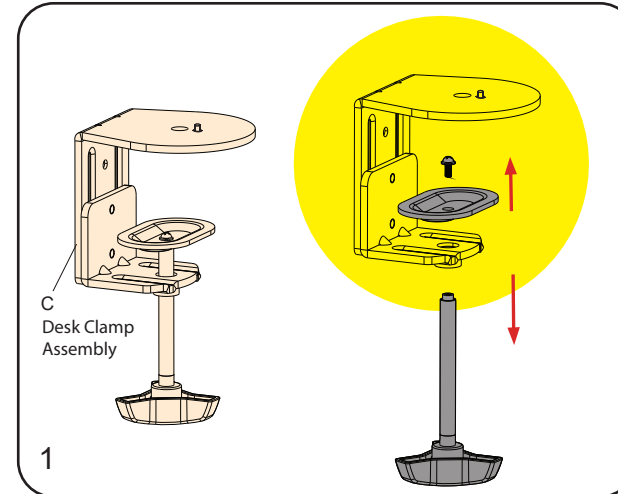

For grommet installation, disassemble the desk clamp (C) and select the right parts.


Peel backing from the silicon pads (F) and attach to the base plate (E).

NOTE Insert security pin of desk clamp assembly (C) in one of the small two holes of pole (B) to center align them.


Insert the adjust screw into the base plate (E) through the hole and pad (H). Then tighten the adjust screw to hold the mount securely.

NOTE Min. Hole Diameter = 10mm (0.39") / Max. Hole Diameter = 75mm (2.95")

2 Installing The Adapter Bracket Assembly

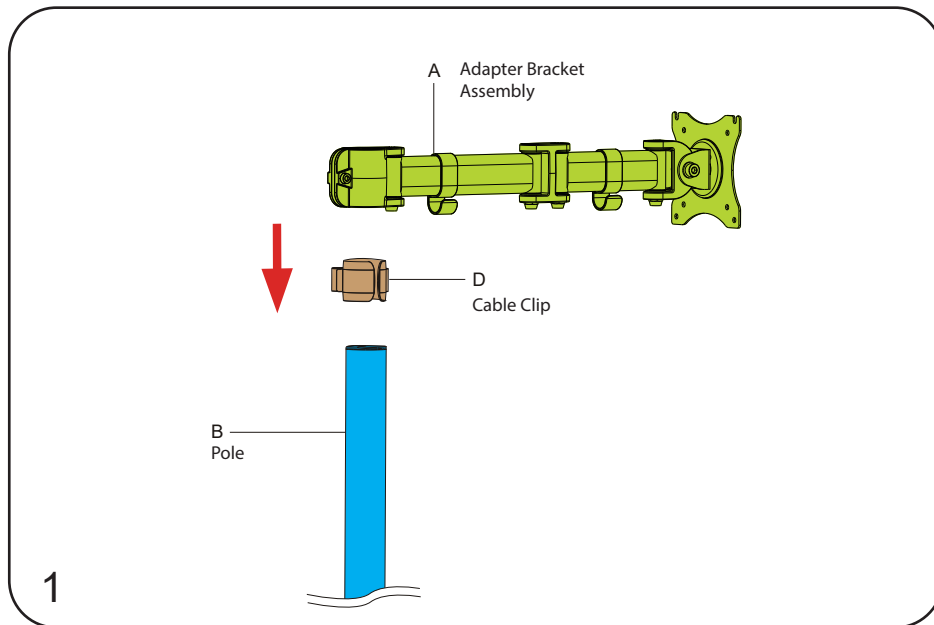




Insert the cable clip (D) first and then the adapter bracket assembly (A) into the pole (B) at a desired height.

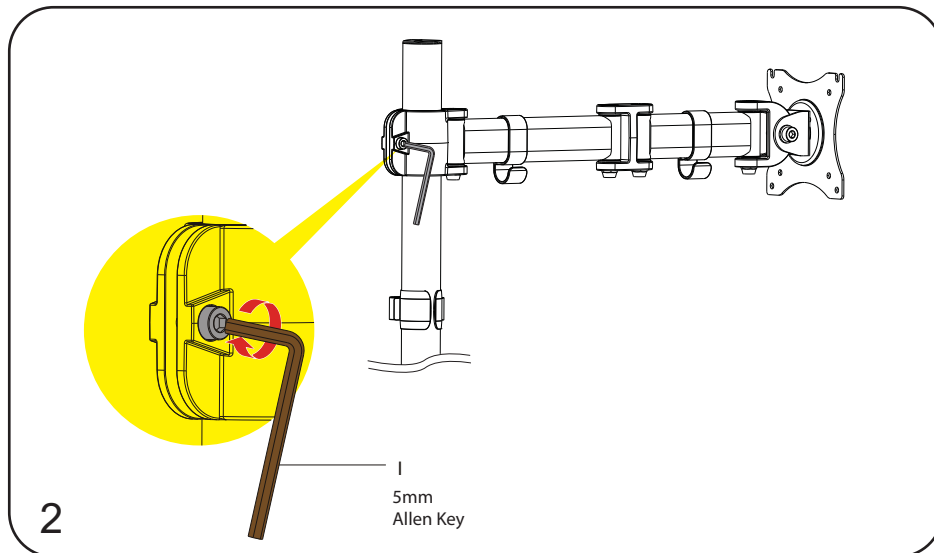

Tighten the screw with a 5mm Allen key (I) to secure the adapter bracket assembly.



3a Attaching The Display (For VESA 100x100mm)

Choose appropriate screws and washers according to your display.

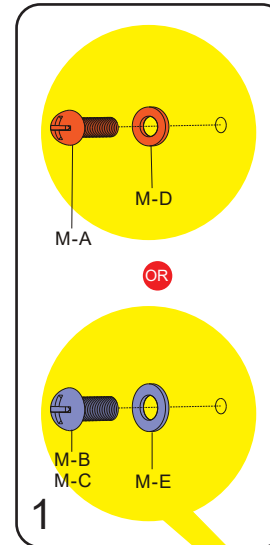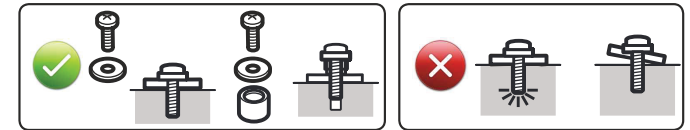

Attach the screws for the top two holes on the back of your display.

Tighten them using a Philips screwdriver leaving a 3mm clearance.

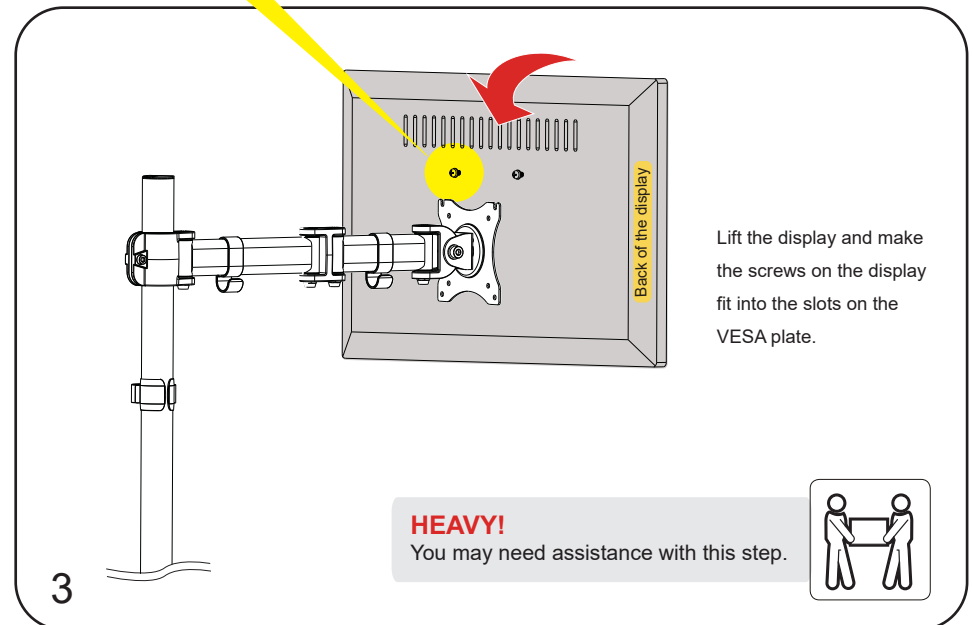


Lift the display and make the screws on the display fit into the slots on the VESA plate.

HEAVY!
You may need assistance with this step.



3a Attaching The Display (For VESA 100x100mm)

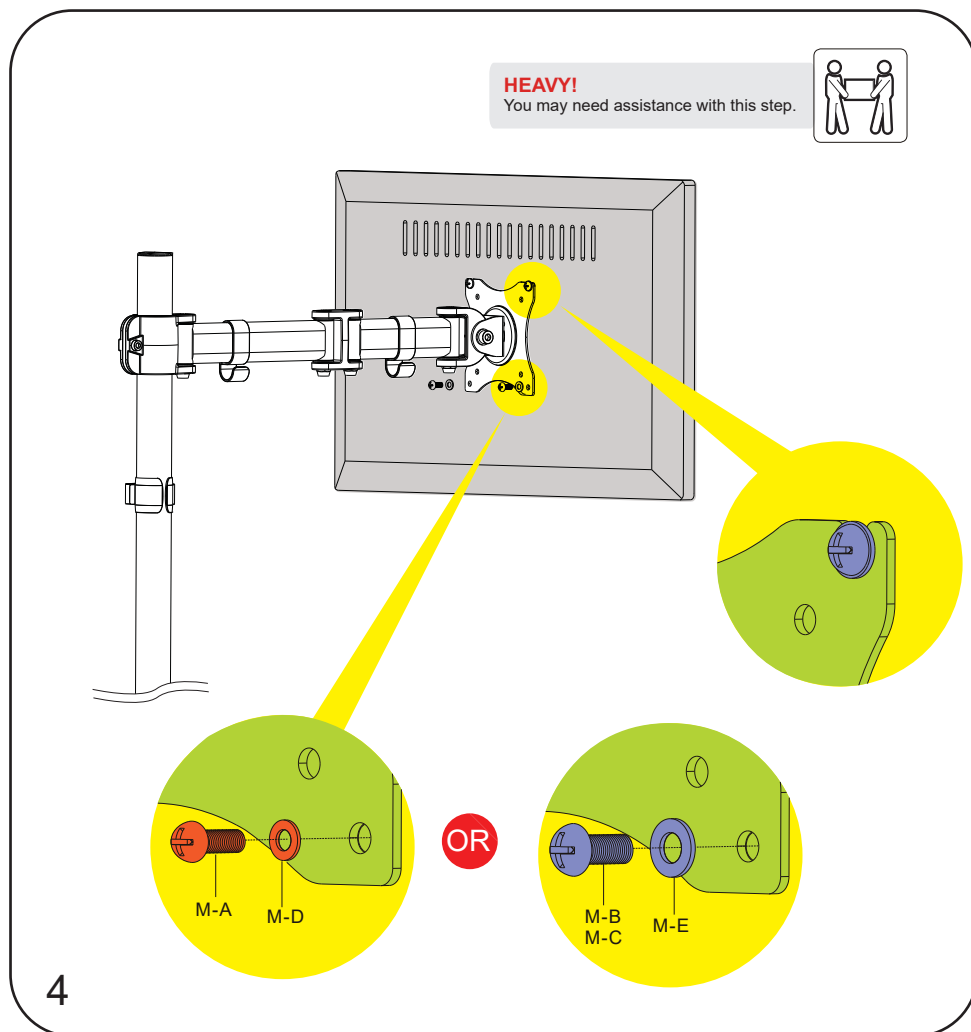


Install both screws through the lower mounting holes on the VESA plate into the display.

WARNING

Tighten all screws but do not over tighten.

3b Attaching The Display (For VESA 75x75mm)

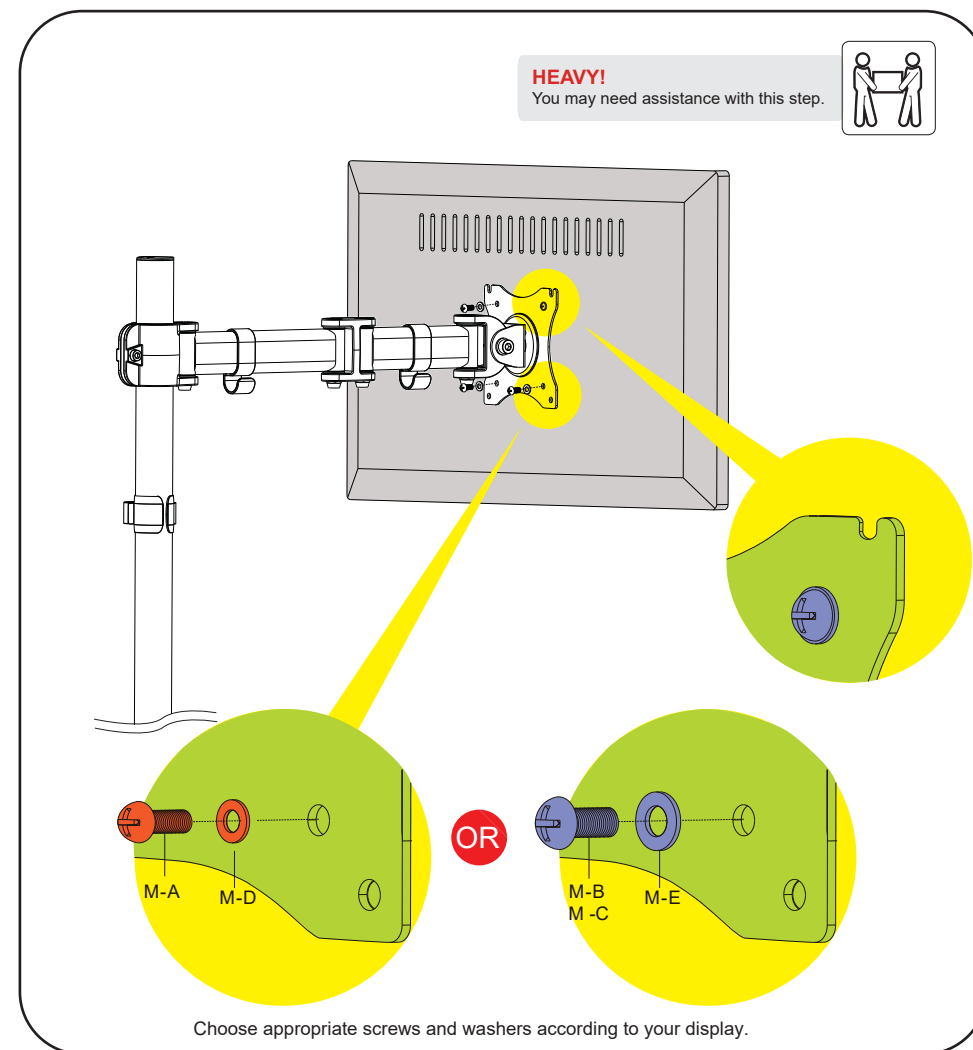


Install all four screws through the inner mounting holes on the VESA plate into the display.

WARNING


Tighten all screws but do not over tighten.

4 Adjustments

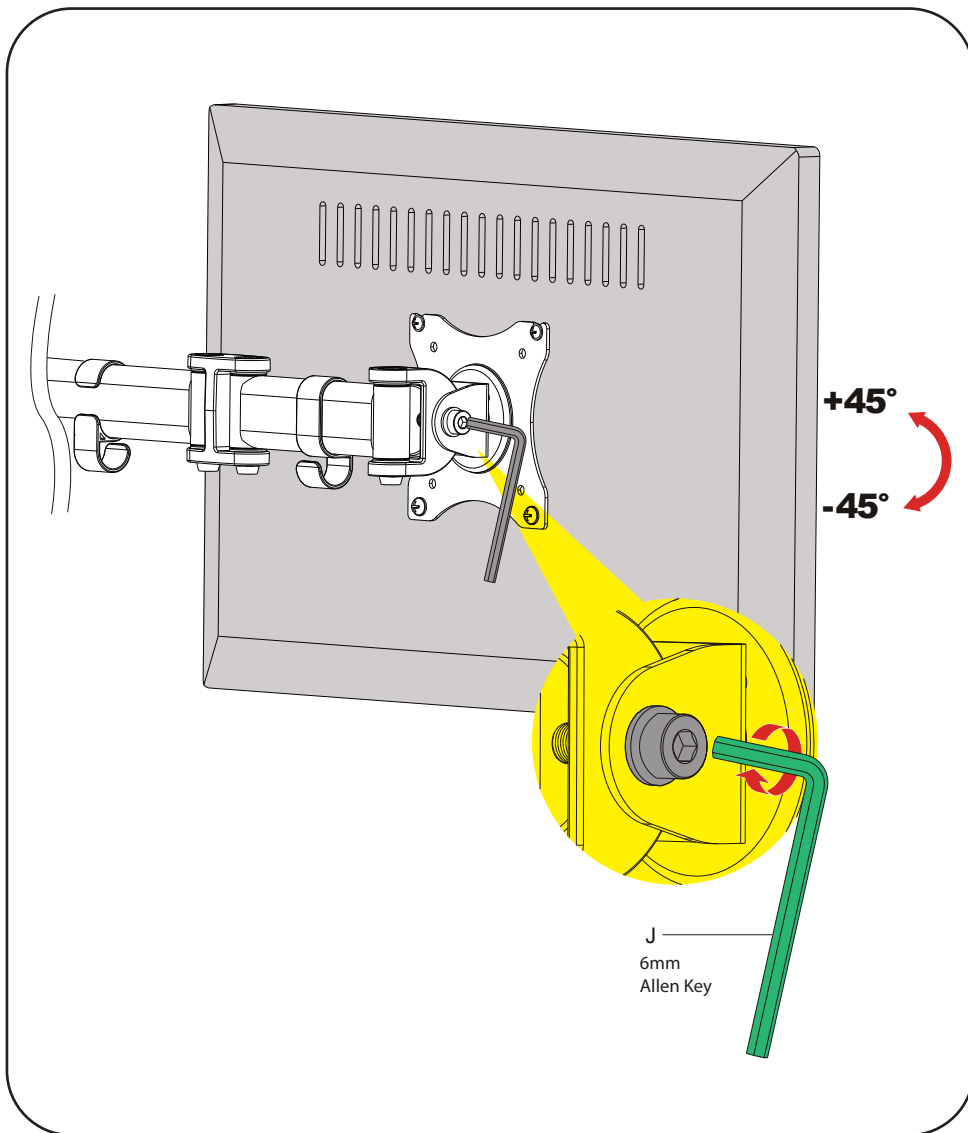


To adjust the display to a desired tilting position, using a 6mm Allen Key (J), slightly loosen or tighten the adjustment screws based on the weight of the display.

5 Cable Management

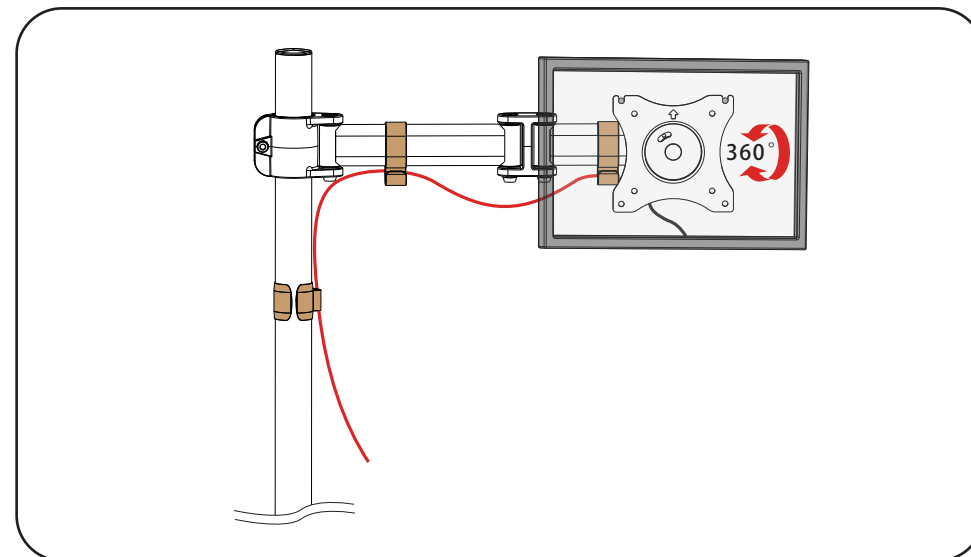

Connect cables to your display and route through the cable clip and along the arms.

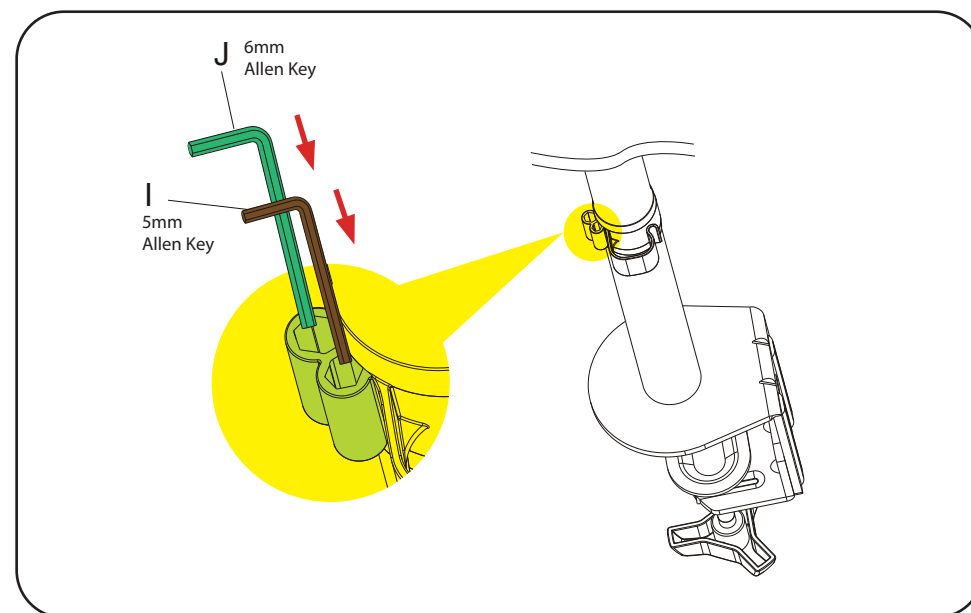

After use, store Allen Keys (I) (J) in the slots behind the cable clip holder.